ATEK
Hydraulic Lifting Systems

TSEK

ST 750 SERİSİ

ST 750 SERIES

Kapasite *Capacity*	750 kg
Kapak Tipi *Material of platform*	Alü. *Alu.*
Platform Tipi *Platform type*	Düz / Katlanır *Flat/foldable*
Voltaj *Voltage*	12/24 Volt



- 5 tona kadar 7.5 t / SLW (hafif) küçük vanlar için
- 600¯mm yük mesafesinde 750¯kg kaldırma kapasitesi
- Sağlam dört silindirli kaldırma mekanizması
- Cıvatalı montaj plakaları sayesinde basit montaj
- Aynı zamanda parça büyüklüğündeki kuyruk kaldırıcı olarak da mevcuttur

- *For small vans up to 7.5¯t / SLW (lightweight) up to 5 t*
- *750¯kg lifting capacity with 600¯mm load distance*
- *Robust four-cylinder lifting mechanism*
- *Simple attachment thanks to boltable mounting plates*
- *Also available as part-sized tail lift*

Uygulanabilir Araçlar / *Available for*


- *Mercedes-Benz Sprinter 3/5*
- *Volkswagen Crafter 30/35/50*
- *Iveco Daily*
- *Renault Master*
- *Ford Transit*
- *Citroen Jumper / Fiat Ducato / Peugeot Boxer*

PLATFORM ÖLÇÜLERİ
PLATFORM DIMENSIONS

Tip / *Type*	Genişlik / *Width*	Yükseklik / *Height*	Net Ağırlık / *Net Weight*
Alu	2100mm	1600mm	102kg
Alu	2100mm	1800mm	110kg

YÜK MERKEZİ
LOAD CENTRE

a (mm)	Q (kg)
600	750
700	650
820	550
1120	400

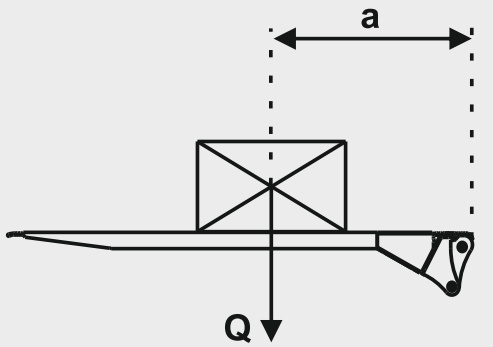

LİFT ÖLÇÜLERİ
LIFT DIMENSIONS

Lift arms	550mm
H (max.) boştaki yükleme yüksekliği / *loading height, unloaded*	1020mm
H (min.) dolu yükleme yüksekliği / *loading height, loaded*	700mm
F (max.) *ana kirişden kasa zeminine olan mesafe* / *middle of main beam to upper edge of loading floor*	565mm
K (min.) F mesafesi maksimumdayken / *at dimension F (max.)*	385mm
D (min.) *Minimum montaj ölçüsü* / *installation dimension, minimum*	670mm
F (min.)	245mm
K (max.) F mesafesi minimumdayken / *at dimension F (min.)*	578mm
D (max.) *Maksimum montaj ölçüsü* / *installation dimension, maximum*	860mm
G (max.)	455mm
G (min.)	230mm

